

e max



PRODUCT GUIDE

 **DYMAX**[®]

 **ELLSWORTH**
ADHESIVES

EMAX Products

Dymax EMAX products are joint labeled materials developed by Dymax exclusively for Ellsworth Adhesives. EMAX products are light-curable materials that are typically used for conformal coating, electronic masking, reinforcement, ruggedization, and bonding glass and plastics.

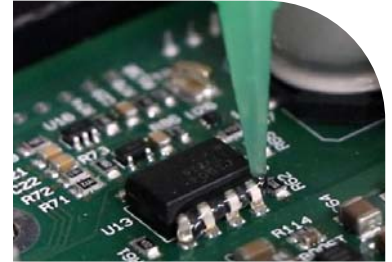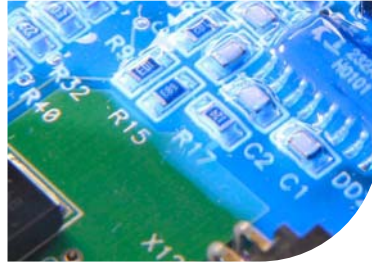



Typical Cost Saving of Dymax Light-Curable Materials

- Cure in seconds; increase throughput
- Minimal floor space requirements
- Simple to dispense – no solvent management or mixing systems required
- No silicone containment required
- Eliminate labor costs associated with complex dispensing system maintenance and manual transferring of parts for long cure
- No secondary inspection of bond area with See-Cure technology

Environmental Benefits of Light-Curing Materials

Dymax understands that safe, ecologically friendly products benefit our customers, the environment, and us. We have created materials that minimize ecological impact. These attributes include:

- No added solvents
- Halogen-free materials
- RoHS compliance
- REACH - no substance of very high concern (SVHC)
- Eco-friendly, one-component materials

Product	Typical Application	Features	Viscosity, cP	Exposure Time in Seconds (Between Glass Slides)	
				BlueWave® 200 10 W/cm ²	ECE 5000 200 mW/cm ²
EMAX G02	 Gasket	UV/Visible light cure; cures soft and tack free; low outgassing; moisture resistant; silicone free; excellent tear resistance; conforms to intricate channels and recesses	40.000	1 s	15 s
EMAX 776-SC	 Maskant	UV/Visible light cure; excellent surface protection; spray or dip; easy peel after exposure to heat; See-Cure technology (blue to pink)	52.000	1 s	8 s
EMAX 904-GEL-SC	 Reinforcement/ Ruggedization	UV/Visible light cure; thixotropic for minimal movement after dispense; See-Cure technology (blue to colorless)	38.000	2 s	10 s
EMAX 904-T-SC	 Reinforcement/ Ruggedization	UV/Visible light cure; thixotropic for minimal movement after dispense; See-Cure technology (blue to colorless)	8.000	2 s	10s
EMAX 906-B-REV-A	 Electronic Maskant	UV/Visible light cure; halogen, silicone free; blue color for easy visual inspection; compatible with gold and copper pins	115.000	3 s	10 s
EMAX 99001	 Industrial Bonder	UV/Visible light cure; moisture and high-temperature resistant; high adhesion to glass and metal	500	2 s	2 s
EMAX 99001-T	 Industrial Bonder	UV/Visible light cure; moisture and high-temperature resistant; high adhesion to glass and metal	6.000	2,8 s	2 s
EMAX 99003	 Conformal Coating	UV/Visible light cure with secondary moisture cure; thermal shock and corrosion resistant; great temperature/humidity performance; blue fluorescing; Approvals: UL 94V-0, UL 746-E, MIL-I-46058C, IPC-CC-830B	690	N/A	50 s*
EMAX 99004	 Encapsulant	UV light cure with secondary moisture cure; flexible; blue fluorescing	12.500	0,2 s	1 s
EMAX 99007	 Encapsulant	UV/Visible light cure with secondary heat cure; flexible; moisture and thermal resistance; blue fluorescing	55.000	0,6 s	1 s

*tack free time for a 0,2 mm coating

See-Cure Technology



See It Dispense

Dymax adhesives with patented See-Cure technology are bright blue in the uncured state. The blue color is easily visible against clear and most colored substrates, enabling simple confirmation of the quantity and location of placement.

See It Cure

As the adhesive cures, the blue color within the adhesive fades and ultimately turns clear after full cure. This serves as a visible confirmation that the adhesive has received a sufficient dose of energy to cure. There is no evidence of the blue color on the finished parts.

Dispensing & Curing Equipment

Dymax dispensing and light-curing systems are perfectly matched to our adhesives' chemistry. Our field-proven dispense solutions are designed to fit many adhesive dispensing applications and include various automatic and manual dispense systems, spray valves, and related components for seamless integration into your assembly process.

We offer a complete line of conventional and LED light-curing equipment including spot, flood, and conveyor systems, as well as radiometers for measuring light intensity. Our equipment can be configured as stand-alone units or integrated into existing manufacturing assembly lines for fast processing.

BlueWave® MX-Series Systems

BlueWave MX-Series curing systems feature all the benefits of LED-curing technology in smaller, more versatile units. These systems are uniquely designed to offer higher, more consistent curing intensity than traditional spot or flood curing systems. They are comprised of a power supply, a controller with an easy-to-use control interface, and an emitter. Emitters are available in three models, the MX-150 (spot), MX-250 (flood), and MX-275 (line) as well as in three different curing wavelengths, 365, 385, and 405 nm.



ECE-Series Flood Lamps

ECE-series flood-lamp systems are ideal for light curing large parts or curing many small parts simultaneously. With intensities ranging from 105-225 mW/cm², Dymax flood lamps are capable of curing most UV light-curable adhesives, sealants, and coatings, tack free in 30 seconds or less. These flood lamps can be incorporated into automated assembly systems or mounted onto conveyors. Dymax flood units can also be used as turnkey bench-top units (with optional shutters).

BlueWave® AX-550

The BlueWave AX-550 combines a controller, emitter, and power supply into a compact, all-in-one LED flood-curing system. Eliminating the need for a large, traditional-style controller and bulky cables, this unit has a greatly reduced footprint and is easily integrated into automated processes.

The system features a large 12,5 x 12,5 cm curing area, which is controlled by an user interface with push-button controls or through a PLC interface. Dymax offers the system with three different wavelength emitters (365, 385, and 405 nm), which are field-upgradeable by customers so they can switch to another wavelength easily if needed.

UVC Conveyor Systems

Dymax conveyor systems are designed to offer consistent, fast, and safe curing. The systems are extremely easy to use and keep users safe by offering complete shielding from UV light. Consistent belt transport speed, adjustable lamp height, and stable lamp intensity provide a consistent light-curing process for repeatable process and optimized throughput. Dymax UVC-series conveyors are an ideal choice for manufacturers who need to cure light-curable adhesives, coatings, and inks on larger parts or on large quantities of smaller parts. UVC systems are available in two models: the UVC-5, a smaller bench-top conveyor, and the UVC-8, a full size, free standing conveyor. These cost-efficient and versatile light-curing systems are perfect for use in labs or manufacturing environments.

ACCU-CAL™ Radiometers

ACCU-CAL radiometers allow operators to monitor, document, and maintain a reliable light-curing process, while ensuring the system is providing the intensity and dosage levels required for successful curing. A radiometer can signal an operator to replace a curing system's degrading bulb, reflector, or lightguide to help prevent incomplete cures from happening. ACCU-CAL radiometers can also measure the intensity of stray or reflected energy and confirm that operators are properly shielded from light exposure.


SG-150 Hand-Held Spray Gun System

SG-150 spray systems, available in standard and high-flow models, utilize a needle valve to control fluid flow and have a dual-acting air cylinder that provides immediate start/stop functionality. A stroke adjustment on the valve can be used to fine tune the flow rate and a precision air regulator/gauge assembly simultaneously activates the atomizing air while the valve is opened and fluid is flowing.

Model 200 Dispensing System

The Dymax Model 200 is a manually controlled dispensing system. Accurate dispensing is achieved through the use of a unique normally-closed, hand-held diaphragm valve. The diaphragm valve is designed with a wand-style body to make it more ergonomic for users. Dymax hand-held dispensing systems can be used for a variety of applications including dot, bead, and potting applications. Dymax hand-held fluid dispensing systems are engineered for optimal performance and long service life.



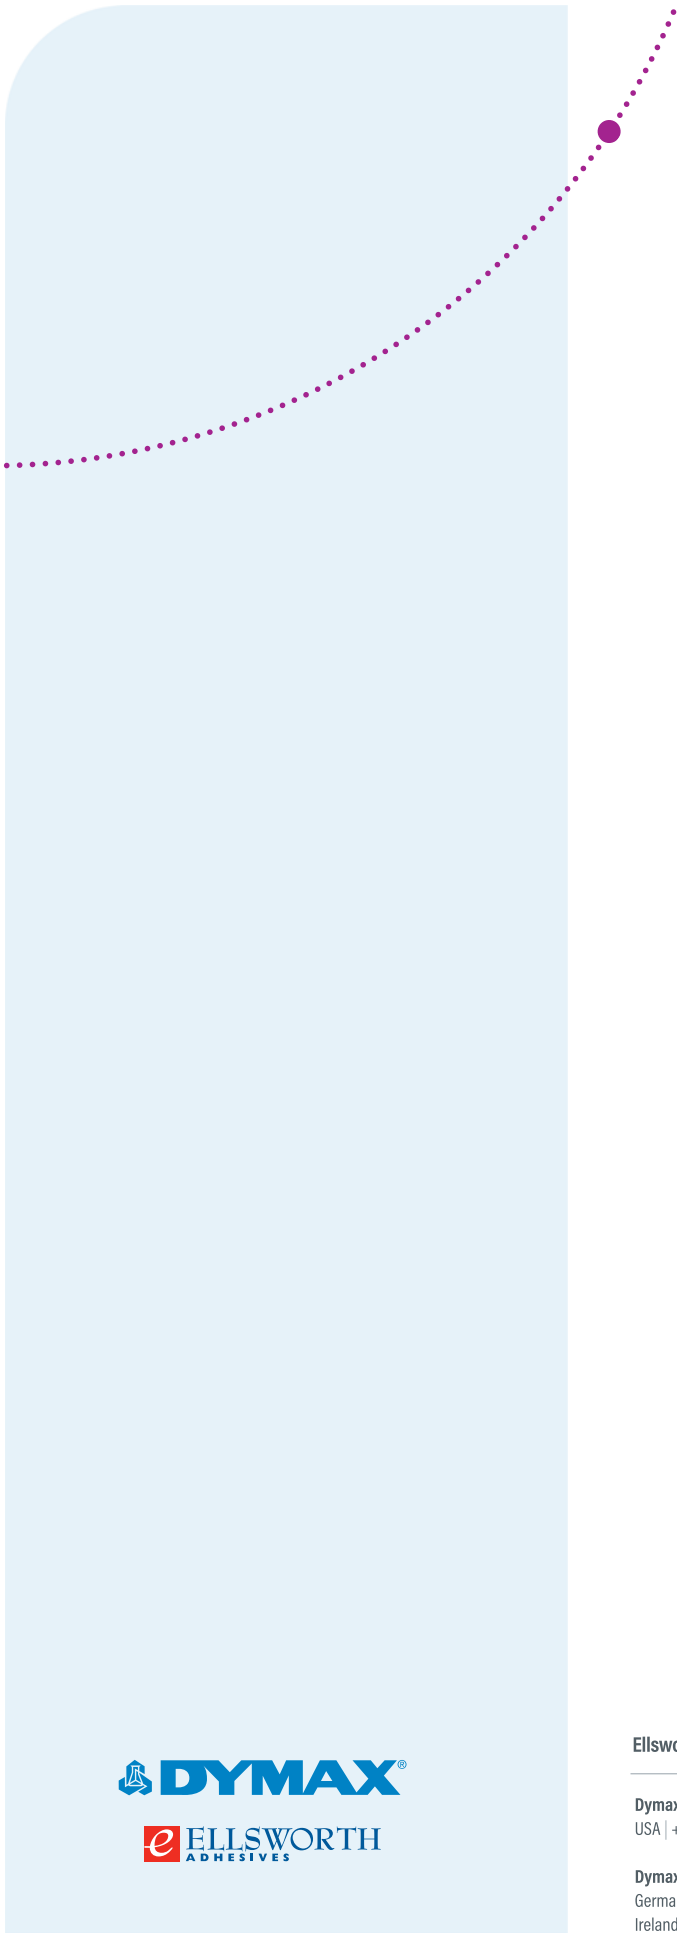

Ellsworth Adhesives Europe | +44 (0) 1355 231 122 | infoeurope@ellsworth.com | www.ellsworthadhesives.co.uk

Dymax Americas
USA | +1.860.482.1010 | info@dymax.com

Dymax Europe
Germany | +49 611.962.7900 | info_de@dymax.com
Ireland | +353 21.237.3016 | info_ie@dymax.com

Dymax Asia
Singapore | +65.67522887 | info_ap@dymax.com
Shanghai | +86.21.37285759 | dymaxasia@dymax.com
Shenzhen | +86.755.83485759 | dymaxasia@dymax.com
Hong Kong | +852.2460.7038 | dymaxasia@dymax.com
Korea | +82.31.608.3434 | info_kr@dymax.com

©2020-2023 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by, Dymax Corporation, U.S.A.

The data contained in this bulletin is of a general nature and is based on laboratory test conditions. Dymax Europe GmbH does not warrant the data contained in this bulletin. Any warranty applicable to products, its application and use is strictly limited to that contained in Dymax Europe GmbH's General Terms and Conditions of Sale published on our website. Dymax Europe GmbH does not assume any responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation that the product use or application will not infringe a patent owned by someone other than Dymax Corporation or act as a grant of license under any Dymax Corporation Patent. Dymax Europe GmbH recommends that each user adequately test its proposed use and application of the products before actual repetitive use, using the data contained in this bulletin as a general guide. **ELLS001EU 12/21/23**